




# ineo 226

- > Black&white A3 multifunctional
- > Up to 22 ppm

Option diagram

Datasheet ineo 226

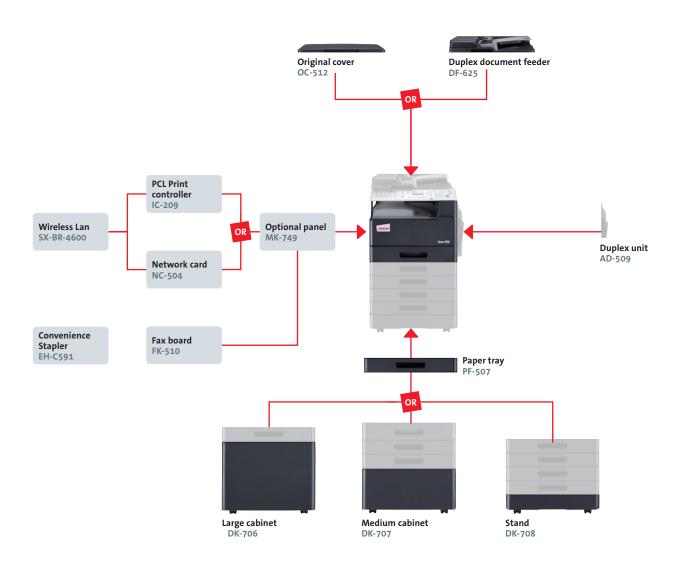

## **Finishing functionalities**



Duplex

ineo 226	Fully multifunctional A3 b/w device with 22 ppm; standard copy, print (GDI) and colour scanning functionality (incl. Scan-to-USB); paper capacity of 350 sheets (incl. multi-bypass tray); 128 MB standard memory; USB 2.0 interface
DF-625 Document feeder	Automatic document feeding of up to 70 sheets
OC-512 Original cover	Cover (instead of ADF)
PF-507 Paper tray	B5–A3, 250 sheets, 64–90 g/m²; up to four can be equipped
DK-706 Desk (large)	For 0 or 1 x PF-507
DK-707 Desk (medium)	For 2 x or 3 x PF-507

DK-708 Desk (small)	For 4 x PF-507
AD-509 Duplex unit	For duplex prints and copies
FK-510 Fax kit	Super G3 fax
IC-209 Controller	PCL print controller for PCL printing incl. network
	functionality
NC-504	Network functionality (print and scan) if IC-209 is
Network interface card	not installed
MK-749 Optional panel	Needed for scan and fax function
MC-504 Mechanical counter	For mechanical counting
SX-BR-4600 Wireless LAN	Wireless LAN to network connector
EH-C591 Convenience stapler	Convenient stapling of up to 50 sheets per set

# **Technical specifications**

### SYSTEM SPECIFICATIONS

System memory	128 MB
Interface	10Base-T/100Base-TX Ethernet (optional); USB 2.0;
	Wi-Fi 802.11b/g (optional)
Network protocols	TTCP/IP (IPv4; IPv6); HTTP; SNMP
Automatic document feeder	Reverse type; up to 70 originals;
(optional)	A5-A3 feeder (optional) 35-128 g/m² (simplex);
	50-128 g/m² (duplex)
Printable paper size	A5-A3
Customised paper sizes	90-297 x 140-432 mm
Printable paper weight	64-157 g/m²
Paper input capacity	Standard: 350 sheets
	Max.: 1.350 sheets
Paper tray 1	250 sheets; A5–A3; customised paper sizes
	(90-297 x 140-432 mm); 64-157 g/m <sup>2</sup>
Multi-bypass tray	100 sheets; A5-A3; customised paper sizes
	(90–297 x 140–432 mm); 64–157 g/m²
Paper tray 2-5 (optional)	250 sheets; B5–A3; customised paper sizes
	(182–297 x 140–432 mm); 64–90 g/m²
Automatic duplexing	A5-A3; 64-90 g/m²
Finishing modes	Group; sort; crisscross
Output capacity	Max.: 250 sheets
Copy/print volume	Rec.: 5,000 pages
	Max. <sup>(1)</sup> : 15,000 pages
Toner lifetime	Up to 12,000 pages
Power consumption	220-240 V / 50/60 Hz; less than 1.3 kWh
System dimensions (W x D x H)	607 x 570 x 458 mm (without options)
System weight	28.2 kg (without options/consumables)

## COPIER SPECIFICATIONS

Copying process	Laser electrostatic image transfer
Toner system	HD polymerised toner
Copy/print speed A4	Up to 22 ppm;
	Up to 24 ppm (from optional paper tray)
Copy/print speed A3	Up to 8.0 ppm
Autoduplex speed A4 (optional	) Up to 15.8 ppm
1st copy out time	Less than 6.5 sec.
Warm-up time	Approx. 15 sec. <sup>(2)</sup>
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multi-copy	1–999
Original format	A5-A3
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	2-in-1; 4-in-1; book copy; ID copy; shift margin;
	erase; image rotation; program registration

### PRINTER SPECIFICATIONS

Print resolution	GDI: 600 x 600 dpi
	PCL (optional): 1,200 x 600 dpi
Page description language	GDI
	PCL 6/5e (optional)
Operating systems	Windows Vista (32/64);
	Windows 7 (32/64);
	Windows 8 (32/64);
	Windows 10 (32/64);
	Windows Server 2008 (32/64);
	Windows Server 2008 R2;
	Windows Server 2012;
	Windows Server 2012 R2;
	Linux; Citrix
Printer fonts	53 PCL Latin
Print functions	N-up; watermark; secure print; image rotation;
	booklet function (optional)

<sup>&</sup>lt;sup>1</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed.

<sup>&</sup>lt;sup>2</sup> Warm up time may vary depending on the operating environment and usage

### SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 46 opm (300 dpi via optional ADF)
	Up to 20 opm (150 dpi via optional ADF)
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-E-mail (optional); Scan-to-SMB (optional);
	Scan-to-FTP (optional); Scan-to-USB;
	Local TWAIN scan; Network TWAIN scan (optional)
File formats	PDF; JPEG; TIFF
Scan destinations	32 one-touch destinations;
	250 speed dial destinations; LDAP support

#### **FAX SPECIFICATIONS**

Fax standard	Super G3 (optional)
Fax transmission	Analogue
	i-Fax
Fax resolution	Standard; Fine; Super-fine
	Max.: 408 x 392 dpi (Super-fine via optional ADF)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	32 one-touch destinations;
	250 speed dial destinations
Fax functions	PC-Fax; polling; forward; phone book; redial

#### System features

Accounting	Up to 50 accounts	
Software	Enterprise Device Manager	
	Web Connection	





Konica Minolta Business Solutions Europe GmbH



Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 www.develop.eu
















For more information regarding the ineo 226  $\,$ please refer to the respective product homepage



All data relating to paper weights apply to media that are recommended by Konica Minolta. All technical data correspond to knowledge available at the time of going to  $print.\ Konica\ Minolta\ reserves\ the\ right\ to\ make\ technical\ alterations.$ 

 ${\tt DEVELOP}\ and\ ineo\ are\ registered\ trademarks/product\ titles\ owned\ by\ Konica\ Minolta$ 

All other brand or product names are registered trademarks or product titles of their respective manufacturers. Konica Minolta does not accept any liability or guarantee  $for these \ products.$ 

April 2016

